


ZHO-0822L/S Open Frame Solenoid

ISO/TS16949 ISO9000 ISO14000
RoHS REACH CE UL VDE TÜV




总重量 Total Weight: 35g
应用范围: 用于蒸汽电饭煲等
APPLICATION: Vapour Electric Cooker etc

安匝/吸引力
AMPERE-TURNS Vs FORCE


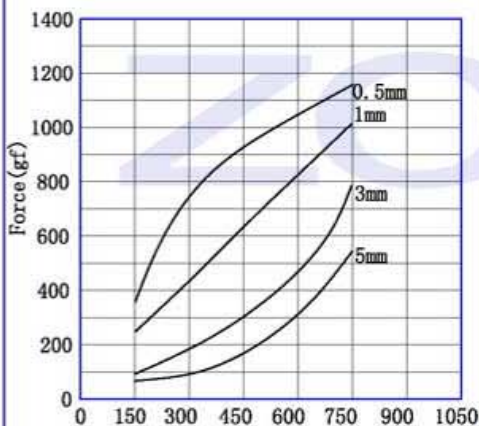


Ampere-turns (AT)

行程/吸引力
STROKE Vs FORCE

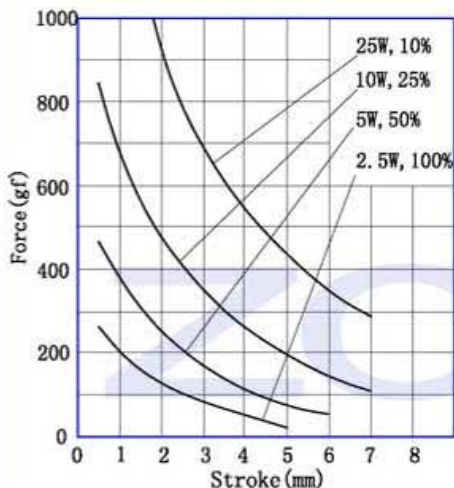


类型: 拉式 TYPE: PULL

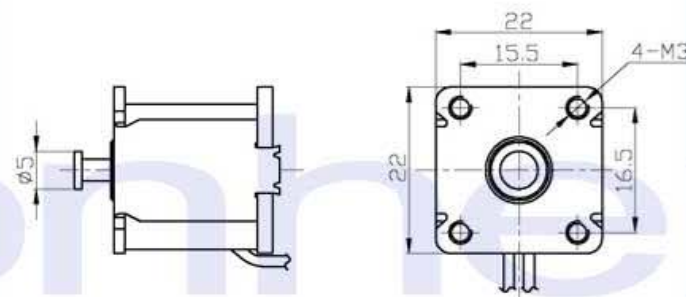


单位:mm Units:mm 通电状态 Shown Energized

滑杆外部与负载连接的典型结构
plunger type:

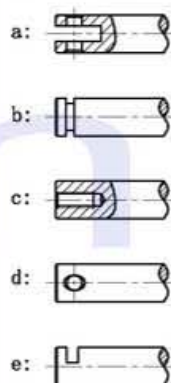

顶杆外部与负载连接的典型结构
push shaft type:

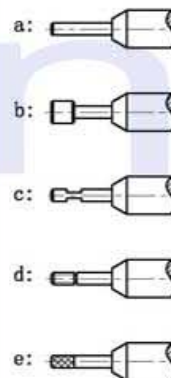

COIL DATA 线圈资料

工作周期(%) = $\frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$ Duty cycle(%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$	连续 Continuous 100%	间断 Or less 50%	间断 Or less 25%	间断 Or less 10%
最大工作时间(秒) MAX. "on" time in seconds	∞	50	19	3
瓦特(W) (20°C) Watts at 20°C	2.5	5	10	25
安匝数AT(20°C) Ampere-turns at 20°C	280	388	487	686
型号 Type no.	阻值(20°C) Resistance (Ω) ±10%	线圈匝数 No. Turns	电压(VDC) VoltS DC	
ZHO-0822L-XX A XX	14.4	671	6	8.5 12 19
L S 拉Pull 推Push	58	1323	12	17 24 38
电压Voltage(V)	230	2291	24	34 48 76
系列号Serial No.: A, B, C...	922	4164	48	68 96 152
电阻Resistance(Ω)				