


ZHV-0420S Solenoid Valve

ISO/TS16949 ISO9000 ISO14000
RoHS REACH CE UL VDE TÜV


类型：二位三通 TYPE:Two position two way

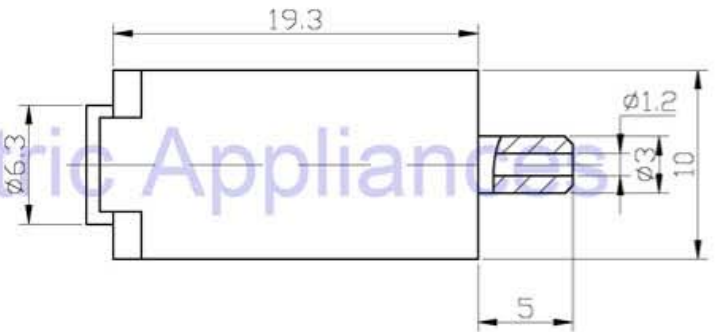

总重量 Total Weight: 15g
应用范围：血压计
APPLICATION: Sphygmomanometer

单位:mm Units:mm

综合特性 GENERAL FEATURES



1. 常用压力:0~375mmHg/0~0.5Bar
Pressure:0~375mmHg/0~0.5Bar

2. 最小通径: \varnothing 0.5mm
Min Orifice: \varnothing 0.5mm

3. 流体介质:空气,
Fluid medium: Air

4. 寿命:典型值为100万次 (on 1s, off 1s)
Lify cycle: 1,000,000 cycles (on 1s, off 1s)

5. 绝缘等级: B类
Insulation class:class B

COIL DATA线圈资料

$$\text{工作周期}(\%) = \frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$$

$$\text{Duty cycle}(\%) = \frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$$

最大工作时间(秒) MAX. "on" time in seconds

瓦特(W) (20℃) Watts at 20℃

安匝数AT(20℃) Ampere-turns at 20℃

	连续 Continuous 100%	间断 Or less 50%	间断 Or less 25%	间断 Or less 10%
--	--------------------------	----------------------	----------------------	----------------------

∞	40	16	1
----------	----	----	---

1.2	2.4	4.8	12
-----	-----	-----	----

219	309	438	692
-----	-----	-----	-----


型号 Type no.

阻值(20℃)
Resistance
(Ω) \pm 10%

线圈匝数
No. Turns

电压(VDC)
Voltage DC

ZHV-0420L-XX A XX

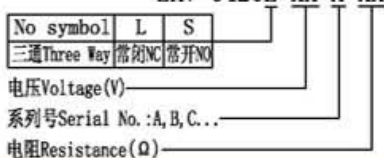

30	1095	6	8.5	12	19
120	2190	12	17	24	38
480	4380	24	34	48	76
1920	8760	48	68	96	152